

D9X


единично

механично

уплътнение

ОСНОВНИ РАЗМЕРИ (мм)

d_b	d_1	d_2	d_4	d_5	d_6	L	L_2	l_1	c	d_{11}	L_{21}	d_{12}	L_{22}
22	35,0	40,0	43	31,0	29,5	27,5	7,5	8,0	1,5	36,0	5,0	-	-
25	38,0	44,0	47	34,5	32,0	27,5	7,5	8,0	1,5	42,0	6,5	-	-
28	42,0	47,0	50	37,5	36,0	31,0	9,0	8,0	1,5	45,0	6,5	45	9,5
32	48,0	53,0	56	42,5	42,2	36,5	10,5	8,0	1,5	50,0	6,5	-	-
35	52,0	56,5	59	46,0	46,2	37,0	11,0	8,0	1,5	54,0	6,5	-	-
70	92,0	100,0	104	90,0	83,0	43,0	13,0	10,0	2,0	95,0	8,0	-	-
115	150,0	167,0	175	148,0	142,0	60,0	12,0	9,0	2,5	-	-	-	-

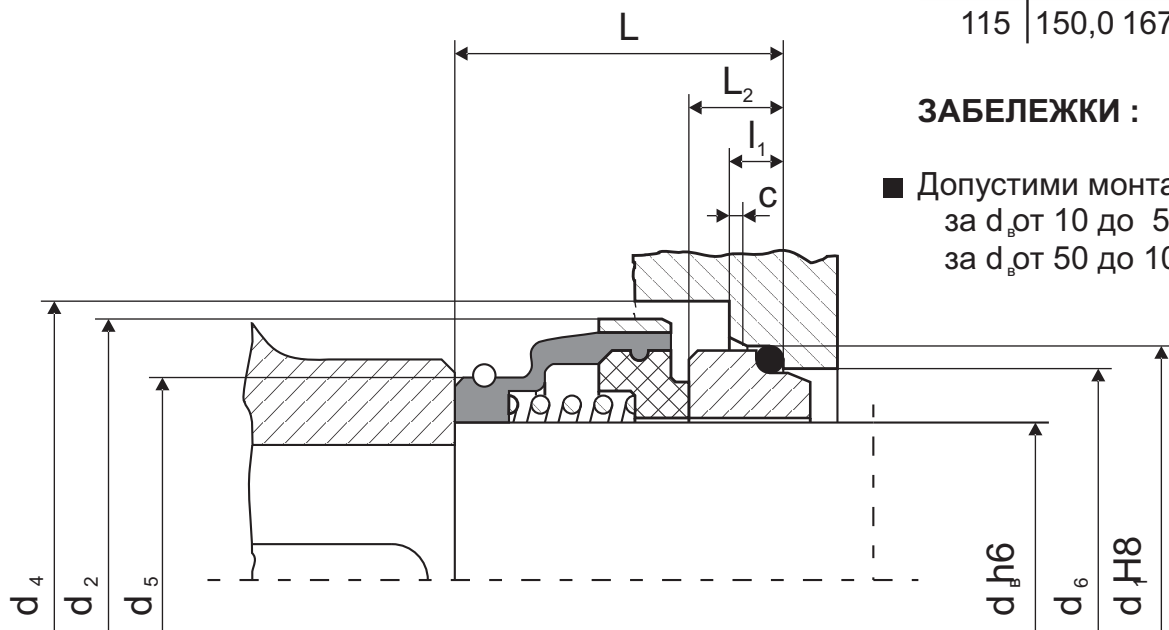

ЗАБЕЛЕЖКИ :


- Допустими монтажни отклонения на размера L, както следва :
за d_b от 10 до 50 мм +/- 0,5 мм
за d_b от 50 до 100 мм +/- 0,8 мм

D9X

single
mechanical
seal

BASIC DIMENSIONS /mm/

d_a	d_1	d_2	d_4	d_5	d_6	L	L_2	l_1	c	d_{11}	L_{21}	d_{12}	L_{22}
22	35,0	40,0	43	31,0	29,5	27,5	7,5	8,0	1,5	36,0	5,0	-	-
25	38,0	44,0	47	34,5	32,0	27,5	7,5	8,0	1,5	42,0	6,5	-	-
28	42,0	47,0	50	37,5	36,0	31,0	9,0	8,0	1,5	45,0	6,5	45	9,5
32	48,0	53,0	56	42,5	42,2	36,5	10,5	8,0	1,5	50,0	6,5	-	-
35	52,0	56,5	59	46,0	46,2	37,0	11,0	8,0	1,5	54,0	6,5	-	-
70	92,0	100,0	104	90,0	83,0	43,0	13,0	10,0	2,0	95,0	8,0	-	-
115	150,0	167,0	175	148,0	142,0	60,0	12,0	9,0	2,5	-	-	-	-

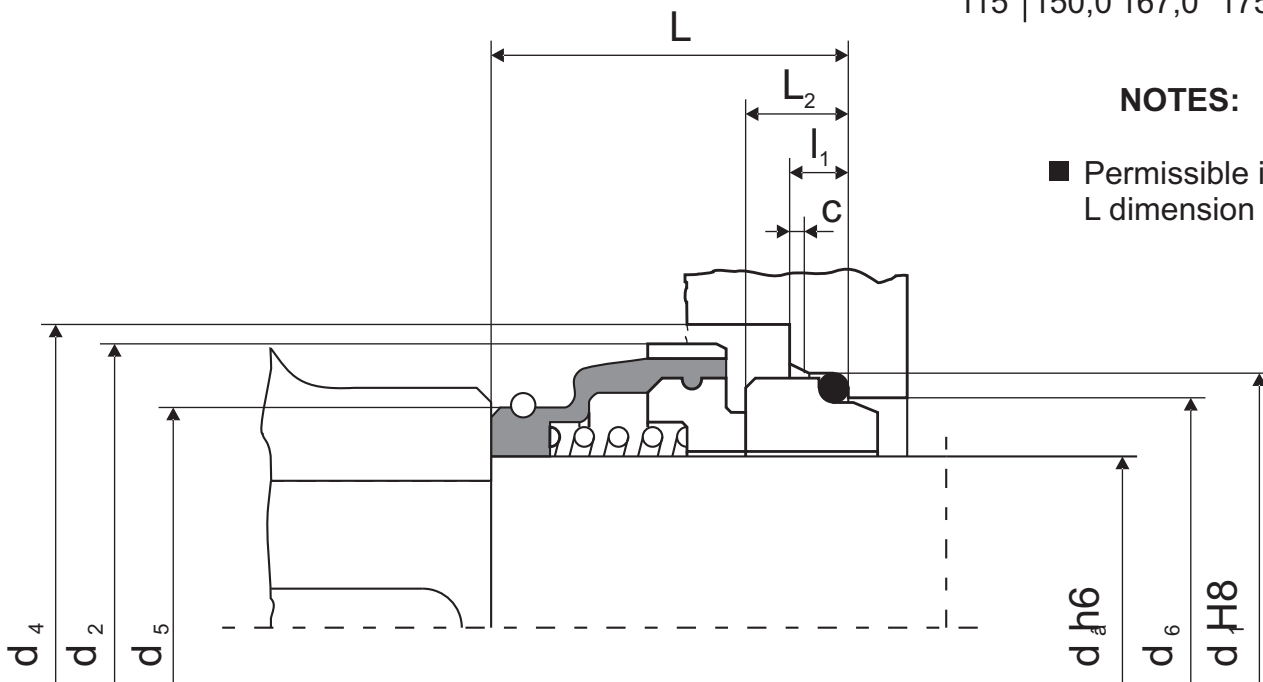

NOTES:

- Permissible installing deviations of the L dimension up to +/- 0,5 mm