


# D300

единично

механично


уплътнение

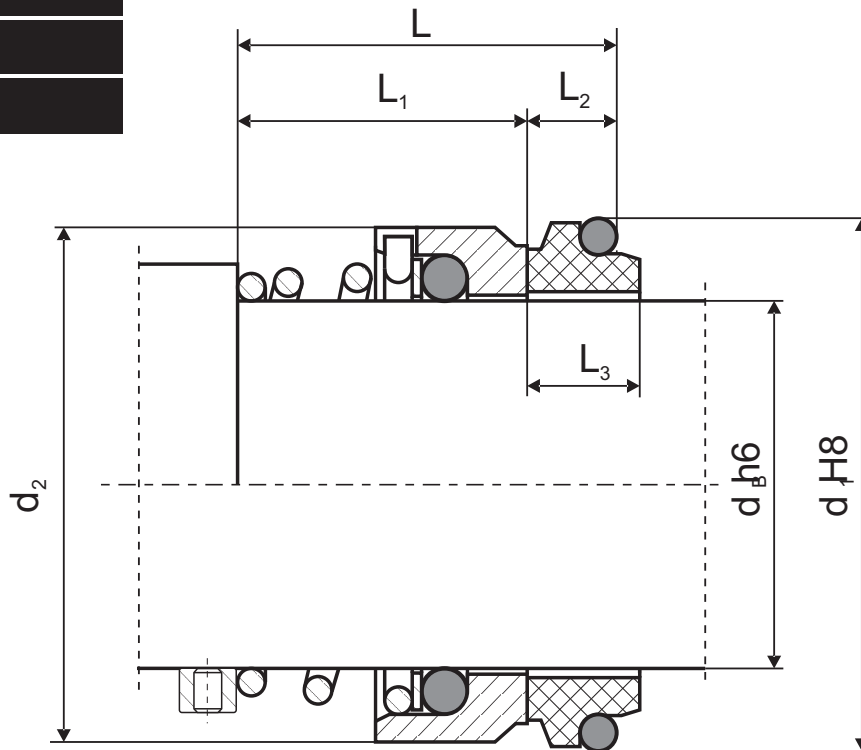

## ЗАБЕЛЕЖКИ :

- Допустими монтажни отклонения на размера L1 - до +/- 1 мм.
- При заявяване да се посочи посоката на въртене на вала. (Гледано от страна на контратялото, вала е с дясно въртене, ако той се движи по посока на часовниковата стрелка).

D302

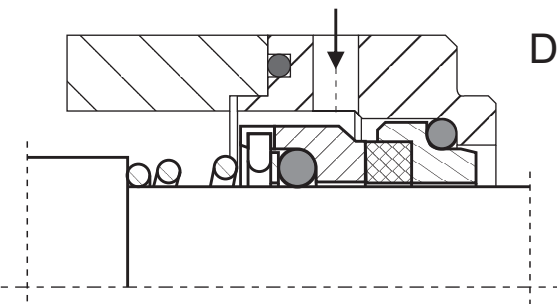

## ОСНОВНИ РАЗМЕРИ (мм)


$d_B$	$d_1$	$d_2$	L	$L_1$	$L_2$	$L_3$
6	16,0	14	16,5	10,5	7,1	9,0
8	19,2	18	22,5	15,5	7,1	9,0
10	19,2	19	22,5	15,5	7,1	9,0
12	21,6	21	23,0	15,5	7,6	10,0
14	24,6	23	23,0	15,5	7,6	10,0
15	24,6	24	24,0	15,5	8,6	11,0
16	28,0	26	26,5	17,5	9,0	11,5
18	30,0	29	28,5	18,5	10,0	12,5
20	35,0	31	29,5	20,0	9,5	12,5
22	35,0	33	31,0	21,5	9,5	12,5
24	38,0	35	32,5	23,0	9,5	12,5
25	38,0	36	34,0	24,5	9,5	12,5
26	40,0	37	34,5	24,5	10,0	13,0
28	42,0	40	35,5	24,5	11,0	14,0
30	45,0	43	35,5	24,5	11,0	14,0
32	48,0	46	39,0	28,0	11,0	14,0
35	52,0	49	39,5	28,0	11,5	14,5
38	55,0	53	42,5	31,0	11,5	14,5
40	58,0	56	45,5	34,0	11,5	14,5
42	62,0	59	49,3	35,0	14,3	17,0
45	64,0	61	50,8	36,5	14,3	17,0
48	68,4	64	56,3	42,0	14,3	17,0
50	69,3	66	57,3	43,0	14,3	17,0
55	75,4	71	62,3	47,0	15,3	18,0
58	78,4	76	65,3	50,0	15,3	18,0
60	80,4	78	66,3	51,0	15,3	18,0
65	85,4	84	67,3	52,0	15,3	18,0
68	91,5	88	69,0	53,0	16,0	19,0
70	92,0	90	69,3	54,0	15,3	18,0
75	99,0	98	70,3	55,0	15,3	18,0
80	104,0	100	74,3	58,0	16,3	19,0

# D320

единично

механично

уплътнение

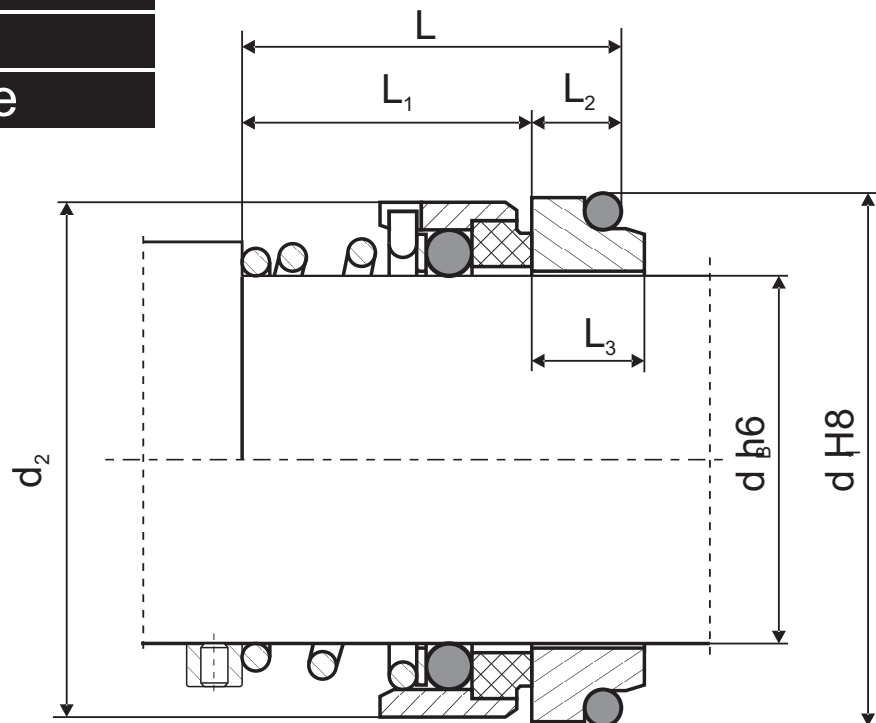


## ОСНОВНИ РАЗМЕРИ (мм)

$d_B$	$d_1$	$d_2$	$L$	$L_1$	$L_2$	$L_3$
6	16,0	16	16,5	11,9	5,6	8,0
8	19,2	18	22,5	16,9	7,0	8,0
10	19,2	20	22,5	16,9	6,6	8,0
12	21,6	22	23,0	17,4	5,6	8,0
14	24,6	24	23,0	17,4	5,6	8,0
15	24,6	25	24,0	17,4	6,6	9,0
16	28,0	26	26,5	19,5	7,5	9,5
18	30,0	31	28,5	20,5	8,0	10,5
20	35,0	34	29,5	22,0	7,5	10,0
22	35,0	36	31,0	23,5	7,5	10,0
24	38,0	38	32,5	25,0	7,5	10,0
25	38,0	39	34,0	26,5	7,5	10,0
26	40,0	40	34,5	26,5	8,0	10,5
28	42,0	42	35,5	26,5	9,0	11,5
30	45,0	44	35,5	25,0	10,5	13,0
32	48,0	46	39,0	28,5	10,5	13,0
35	52,0	49	39,5	28,5	11,0	13,5
38	55,0	54	42,5	32,2	10,3	13,0
40	58,0	56	45,5	34,7	10,8	13,5
42	62,0	58	49,3	37,3	12,0	14,5
45	64,0	61	50,8	39,2	11,6	14,5
48	68,4	64	56,3	44,7	11,6	14,5
50	69,3	66	57,3	45,7	11,6	14,5
55	75,4	71	62,3	49,0	13,3	16,0
58	78,4	78	65,3	52,0	13,3	16,0
60	80,4	79	66,3	53,0	13,3	16,0
65	85,4	85	67,3	54,3	13,0	16,0
68	91,5	88	69,0	55,3	13,7	16,0
70	92,0	90	69,3	56,3	13,0	16,0
75	99,0	98	70,3	56,3	14,0	17,0
80	104,0	103	74,3	59,3	15,0	17,5


### ЗАБЕЛЕЖКИ :

- Допустими монтажни отклонения на размера  $L_1$  - до +/- 1 мм.
- При заявяване да се посочи посоката на въртене на вала. (Гледано от страна на контратялото, вала е с дясно въртене, ако той се движи по посока на часовниковата стрелка).

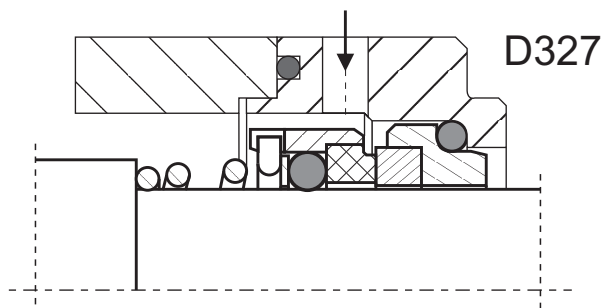


# D300

single  
mechanical  
seal

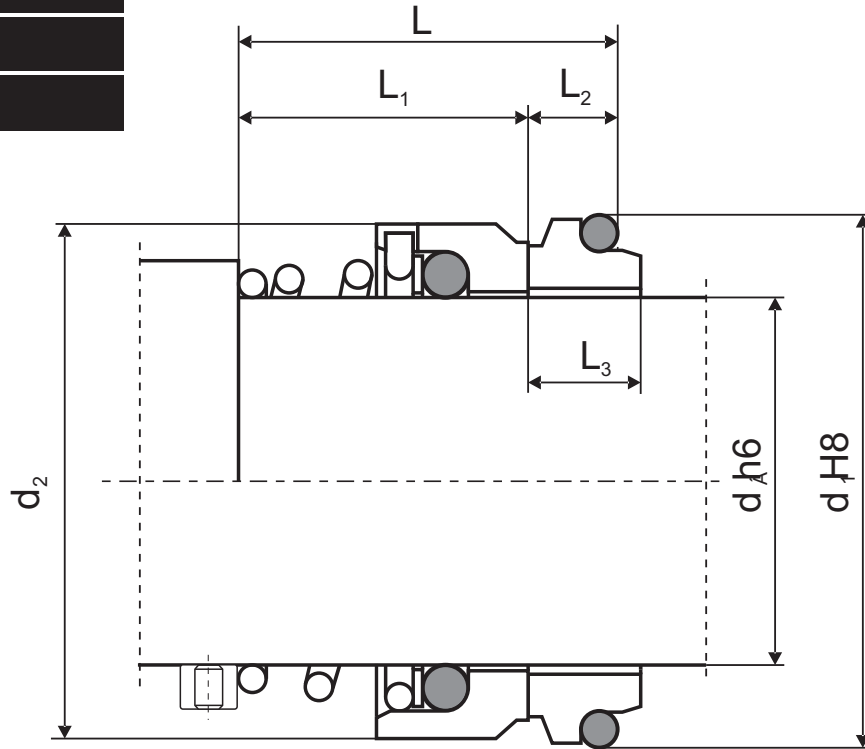

## NOTES:

- Permissible installing deviations of the L1 dimension up to +/- 1 mm.
- When placing an order specify the shaft rotation direction.  
( From the counterface point of view the shaft rotates to the right, if it moves clockwise).

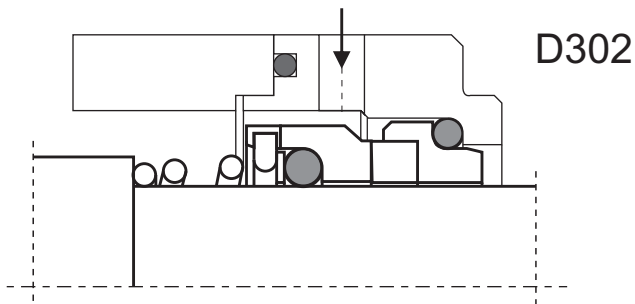


## BASIC DIMENSIONS /mm/

$d_A$	$d_1$	$d_2$	L	$L_1$	$L_2$	$L_3$
6	16,0	14	16,5	10,5	7,1	9,0
8	19,2	18	22,5	15,5	7,1	9,0
10	19,2	19	22,5	15,5	7,1	9,0
12	21,6	21	23,0	15,5	7,6	10,0
14	24,6	23	23,0	15,5	7,6	10,0
15	24,6	24	24,0	15,5	8,6	11,0
16	28,0	26	26,5	17,5	9,0	11,5
18	30,0	29	28,5	18,5	10,0	12,5
20	35,0	31	29,5	20,0	9,5	12,5
22	35,0	33	31,0	21,5	9,5	12,5
24	38,0	35	32,5	23,0	9,5	12,5
25	38,0	36	34,0	24,5	9,5	12,5
26	40,0	37	34,5	24,5	10,0	13,0
28	42,0	40	35,5	24,5	11,0	14,0
30	45,0	43	35,5	24,5	11,0	14,0
32	48,0	46	39,0	28,0	11,0	14,0
35	52,0	49	39,5	28,0	11,5	14,5
38	55,0	53	42,5	31,0	11,5	14,5
40	58,0	56	45,5	34,0	11,5	14,5
42	62,0	59	49,3	35,0	14,3	17,0
45	64,0	61	50,8	36,5	14,3	17,0
48	68,4	64	56,3	42,0	14,3	17,0
50	69,3	66	57,3	43,0	14,3	17,0
55	75,4	71	62,3	47,0	15,3	18,0
58	78,4	76	65,3	50,0	15,3	18,0
60	80,4	78	66,3	51,0	15,3	18,0
65	85,4	84	67,3	52,0	15,3	18,0
68	91,5	88	69,0	53,0	16,0	19,0
70	92,0	90	69,3	54,0	15,3	18,0
75	99,0	98	70,3	55,0	15,3	18,0
80	104,0	100	74,3	58,0	16,3	19,0

# D320

single  
mechanical  
seal

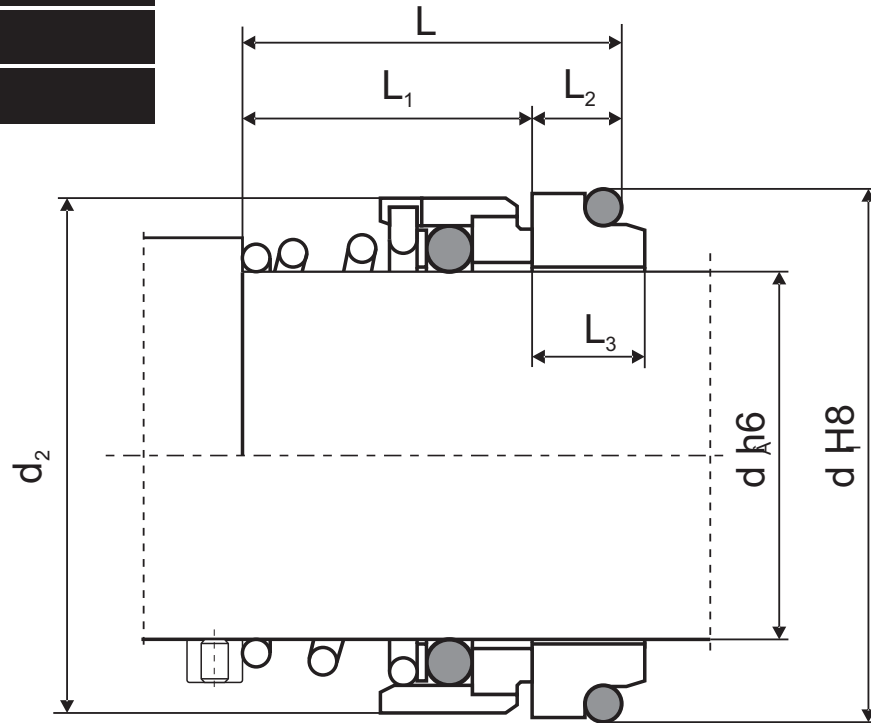

## NOTES:

- Permissible installing deviations of the L<sub>1</sub> dimension up to +/- 1 mm.
- When placing an order specify the shaft rotation direction.  
( From the counterface point of view the shaft rotates to the right, if it moves clockwise).

## BASIC DIMENSIONS /mm/

d <sub>A</sub>	d <sub>1</sub>	d <sub>2</sub>	L	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>
6	16,0	16	16,5	11,9	5,6	8,0
8	19,2	18	22,5	16,9	7,0	8,0
10	19,2	20	22,5	16,9	6,6	8,0
12	21,6	22	23,0	17,4	5,6	8,0
14	24,6	24	23,0	17,4	5,6	8,0
15	24,6	25	24,0	17,4	6,6	9,0
16	28,0	26	26,5	19,5	7,5	9,5
18	30,0	31	28,5	20,5	8,0	10,5
20	35,0	34	29,5	22,0	7,5	10,0
22	35,0	36	31,0	23,5	7,5	10,0
24	38,0	38	32,5	25,0	7,5	10,0
25	38,0	39	34,0	26,5	7,5	10,0
26	40,0	40	34,5	26,5	8,0	10,5
28	42,0	42	35,5	26,5	9,0	11,5
30	45,0	44	35,5	25,0	10,5	13,0
32	48,0	46	39,0	28,5	10,5	13,0
35	52,0	49	39,5	28,5	11,0	13,5
38	55,0	54	42,5	32,2	10,3	13,0
40	58,0	56	45,5	34,7	10,8	13,5
42	62,0	58	49,3	37,3	12,0	14,5
45	64,0	61	50,8	39,2	11,6	14,5
48	68,4	64	56,3	44,7	11,6	14,5
50	69,3	66	57,3	45,7	11,6	14,5
55	75,4	71	62,3	49,0	13,3	16,0
58	78,4	78	65,3	52,0	13,3	16,0
60	80,4	79	66,3	53,0	13,3	16,0
65	85,4	85	67,3	54,3	13,0	16,0
68	91,5	88	69,0	55,3	13,7	16,0
70	92,0	90	69,3	56,3	13,0	16,0
75	99,0	98	70,3	56,3	14,0	17,0
80	104,0	103	74,3	59,3	15,0	17,5

D327

